

Figure 2a

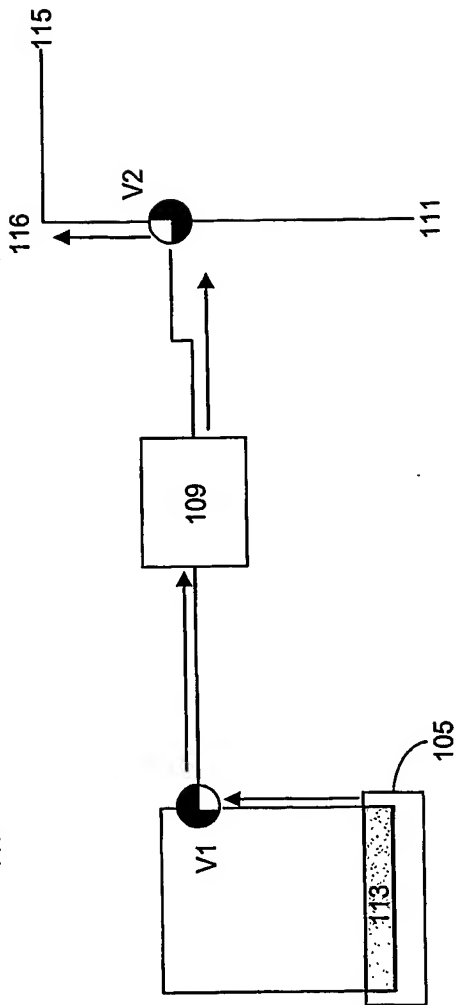


Figure 2b

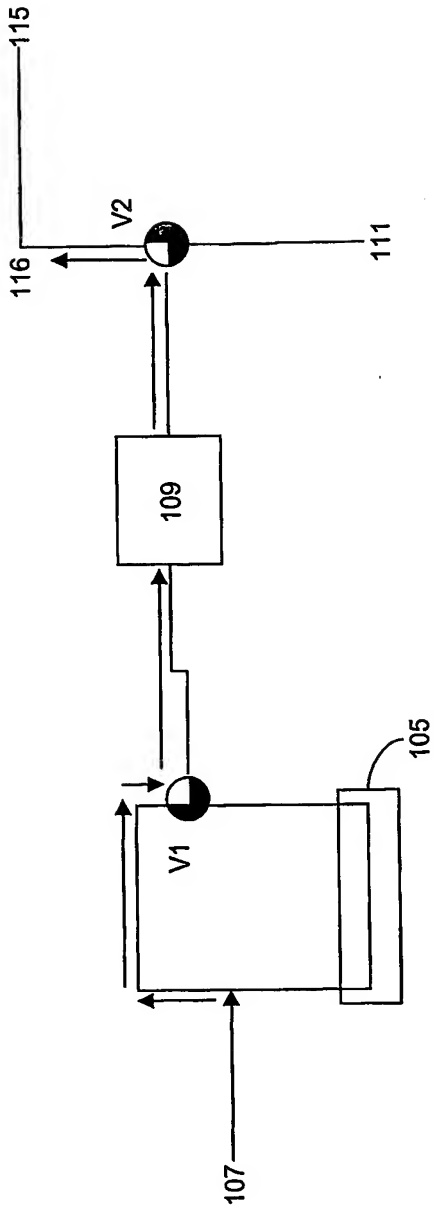


Figure 2c

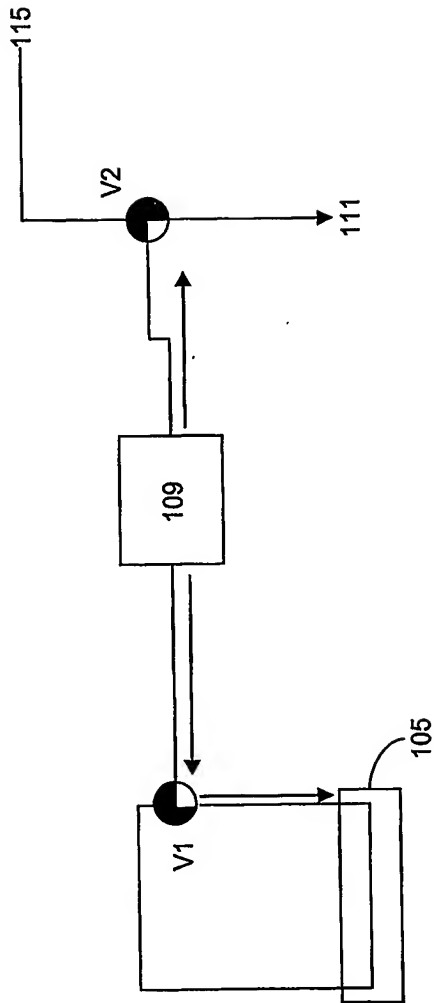


Figure 2d

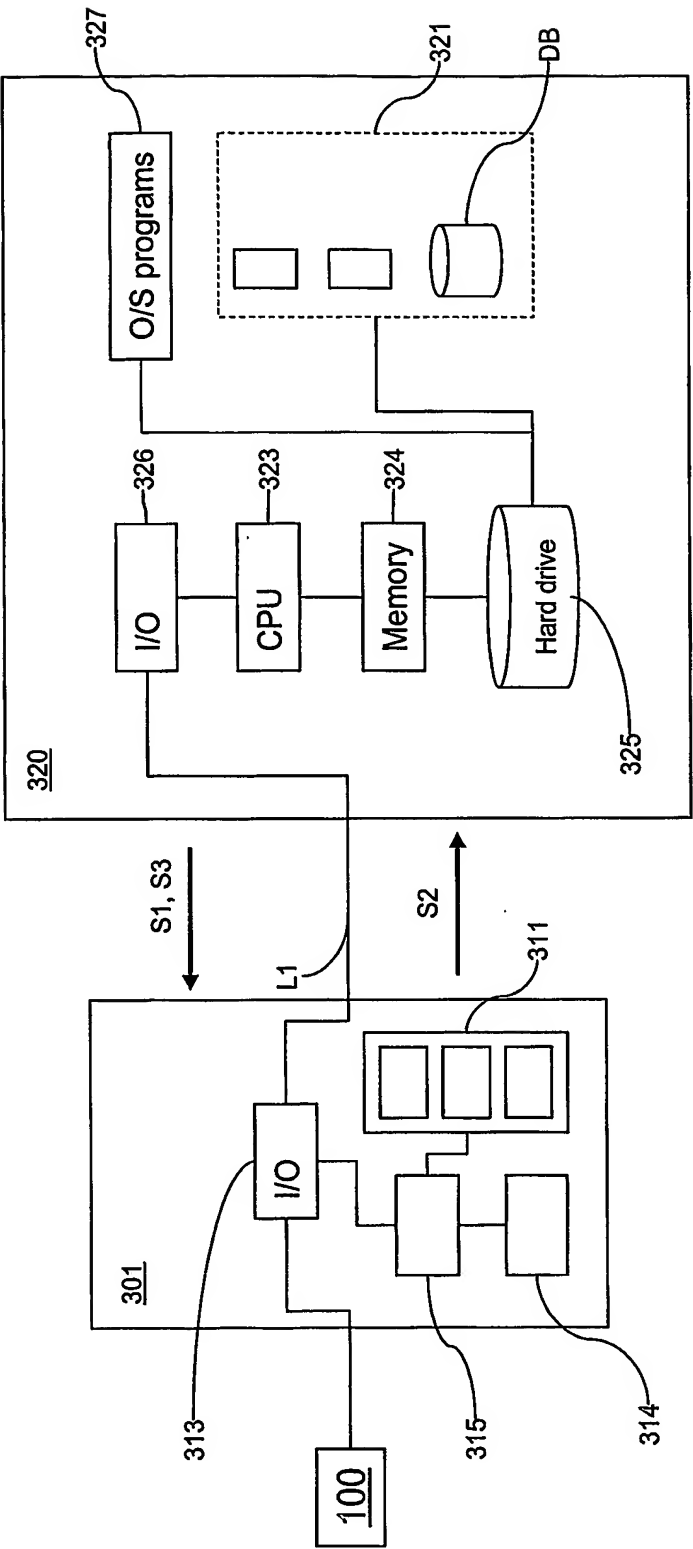


Figure 3

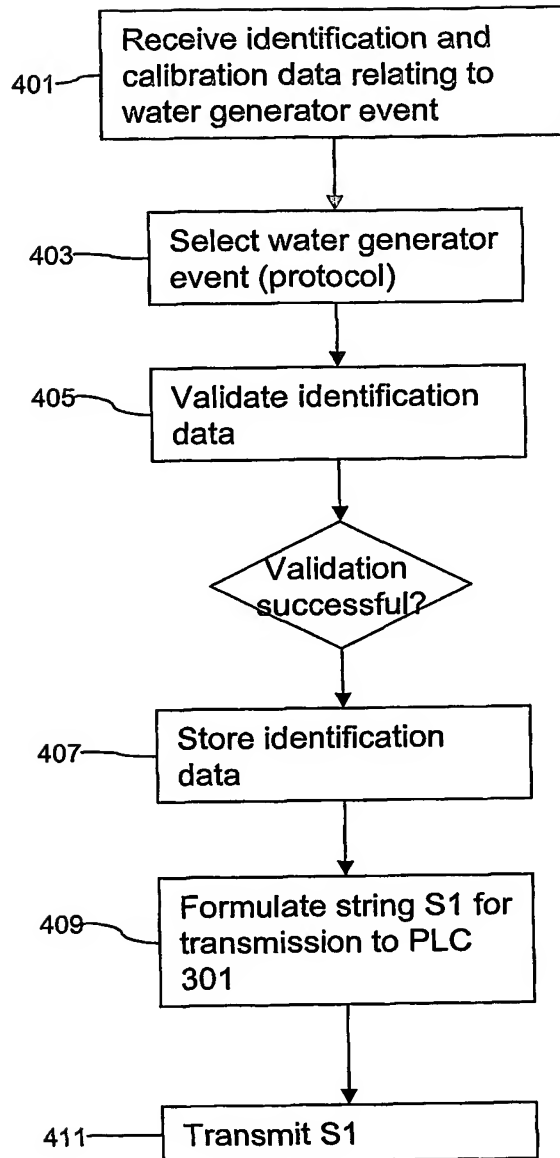
5/13

Figure 4

6/13

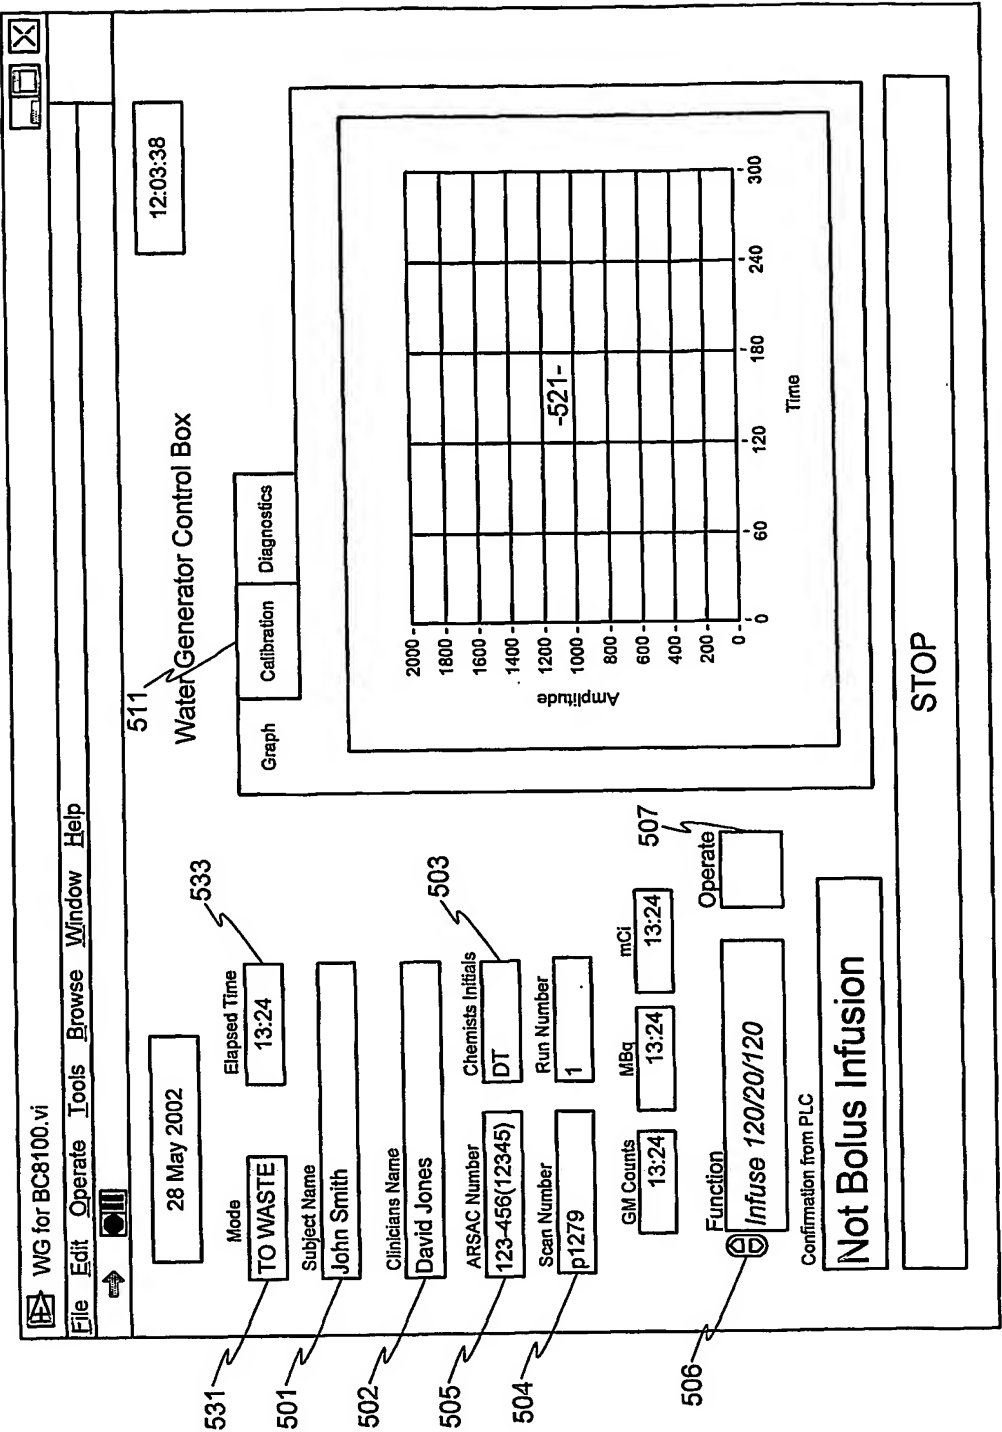


Fig. 5

7/13

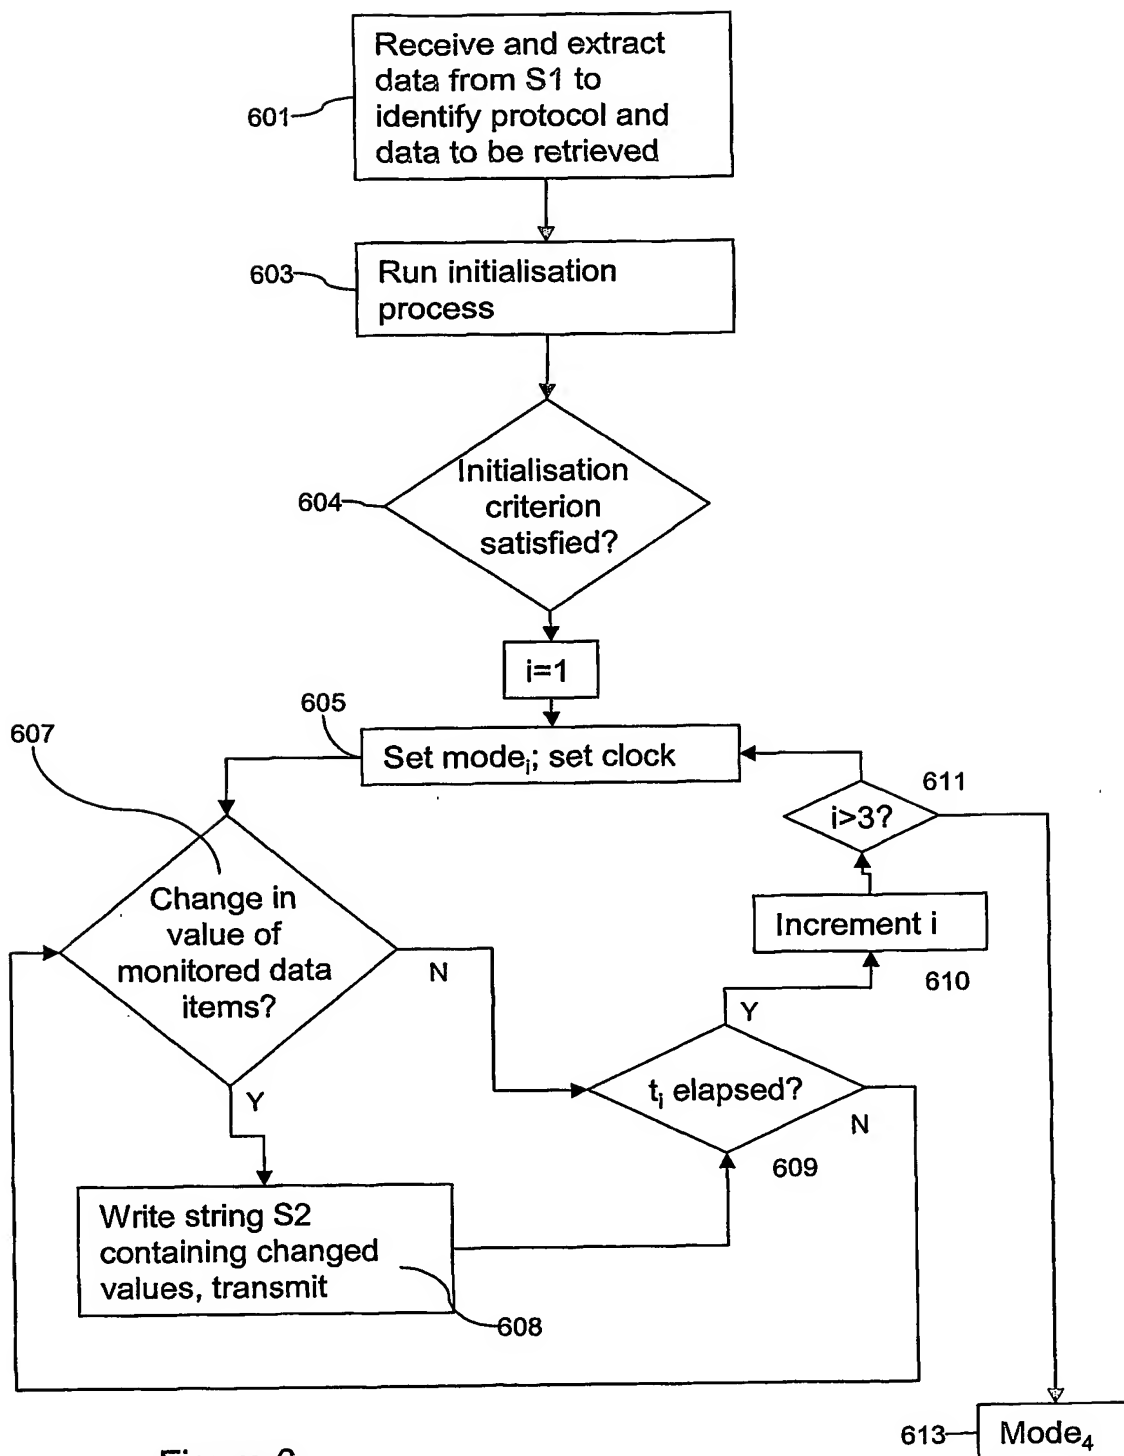


Figure 6

8/13

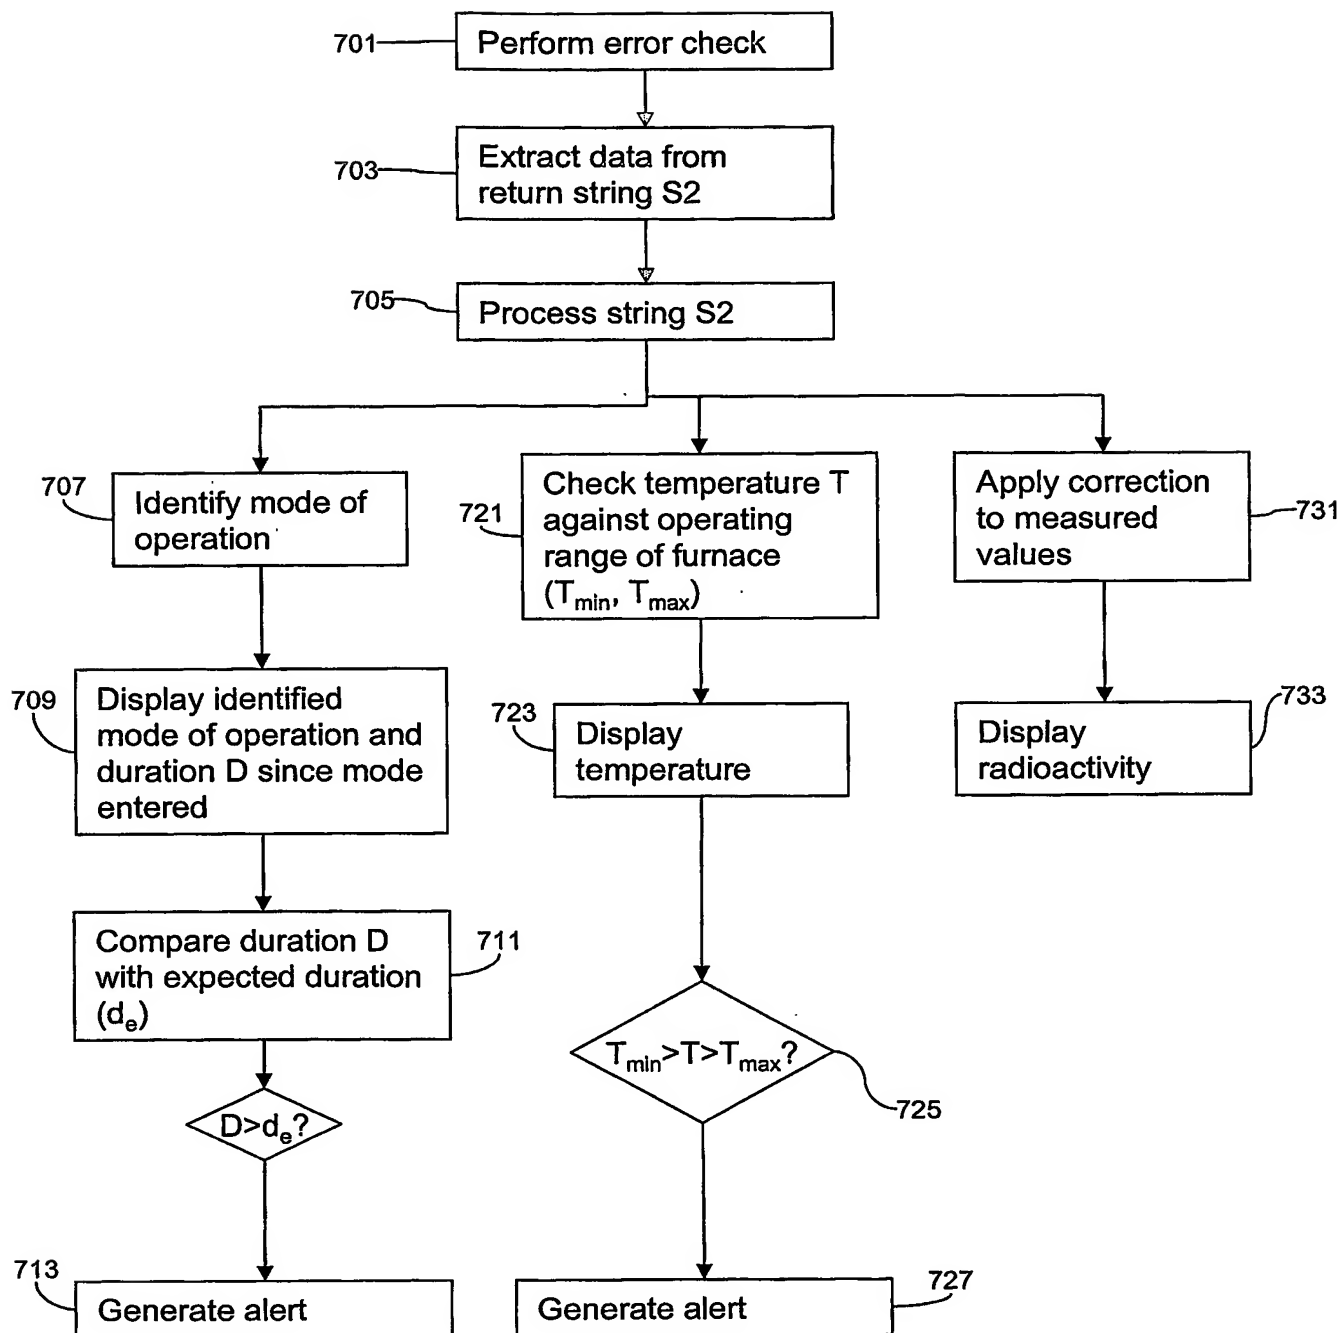


Figure 7

9/13

The diagram shows a control panel with the following elements:

- Top Navigation Bar:** Three tabs labeled "Graph", "Calibration", and "Diagnostics".
- Status Indicators (Left Column):**
 - Running: ☒
 - V1: ☒
 - V1 on/off: ☐
 - V2: ☒
 - V2 on/off: ☐
 - Temp Error: ☒
 - T/c Fault: ☒
 - RS232 Error: ☒
 - EndofFlush: ☒
- Data Fields (Center):**
 - Sent:
 - Reply:
 - Oven Temperature: (labeled 801)
 - Protocol Number:
 - Protocol String:
 - Calibration:
 - Background:
- Indicator Lights (Right Column):**
 - PN: ☒
 - DN: ☒
 - CI: ☒ (circled)
 - RN: ☒
 - SN: ☒
 - AR: ☐
 - AB: ☒

Fig. 8

10/13

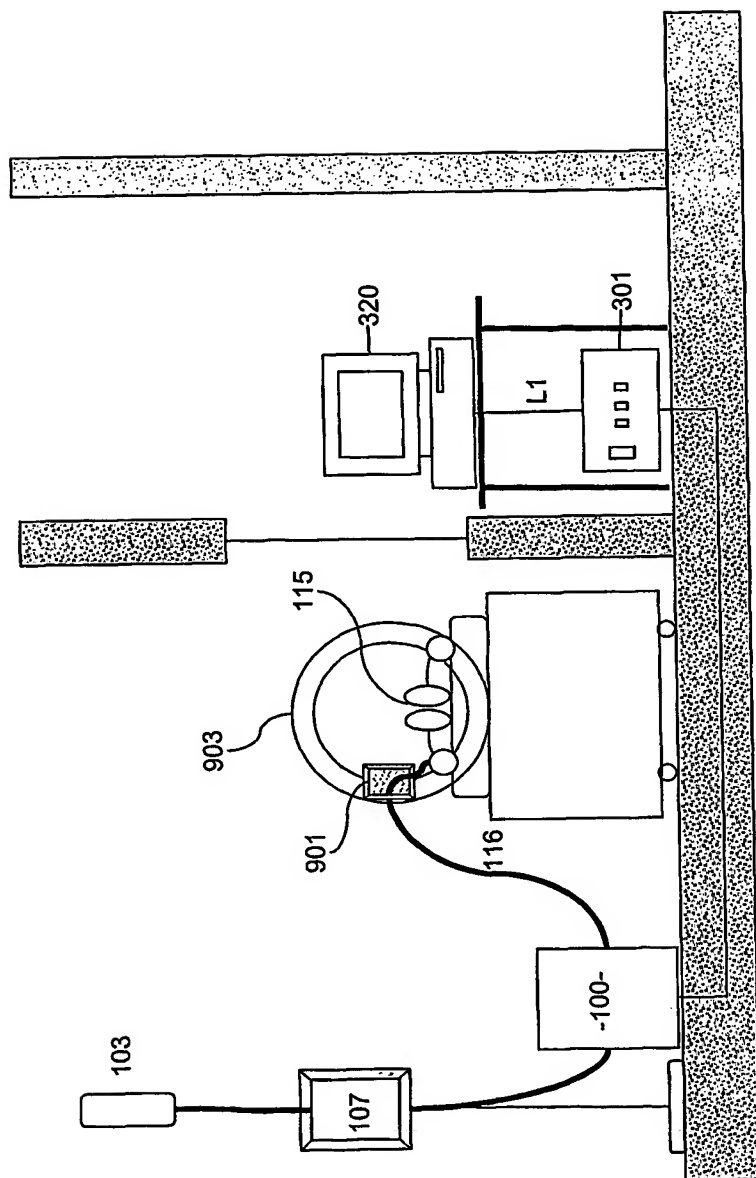


Figure 9

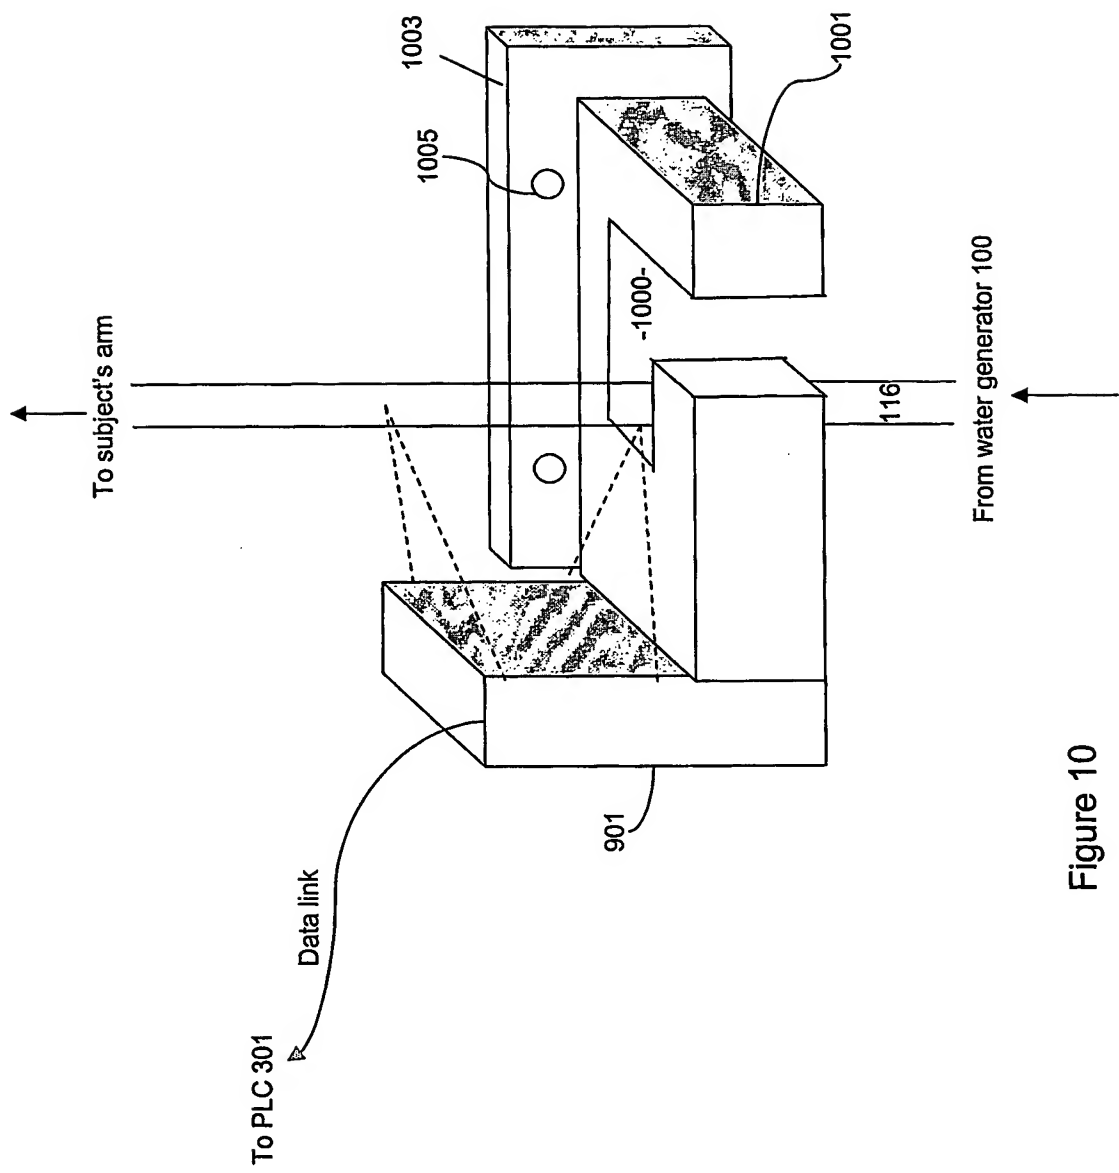


Figure 10

12/13

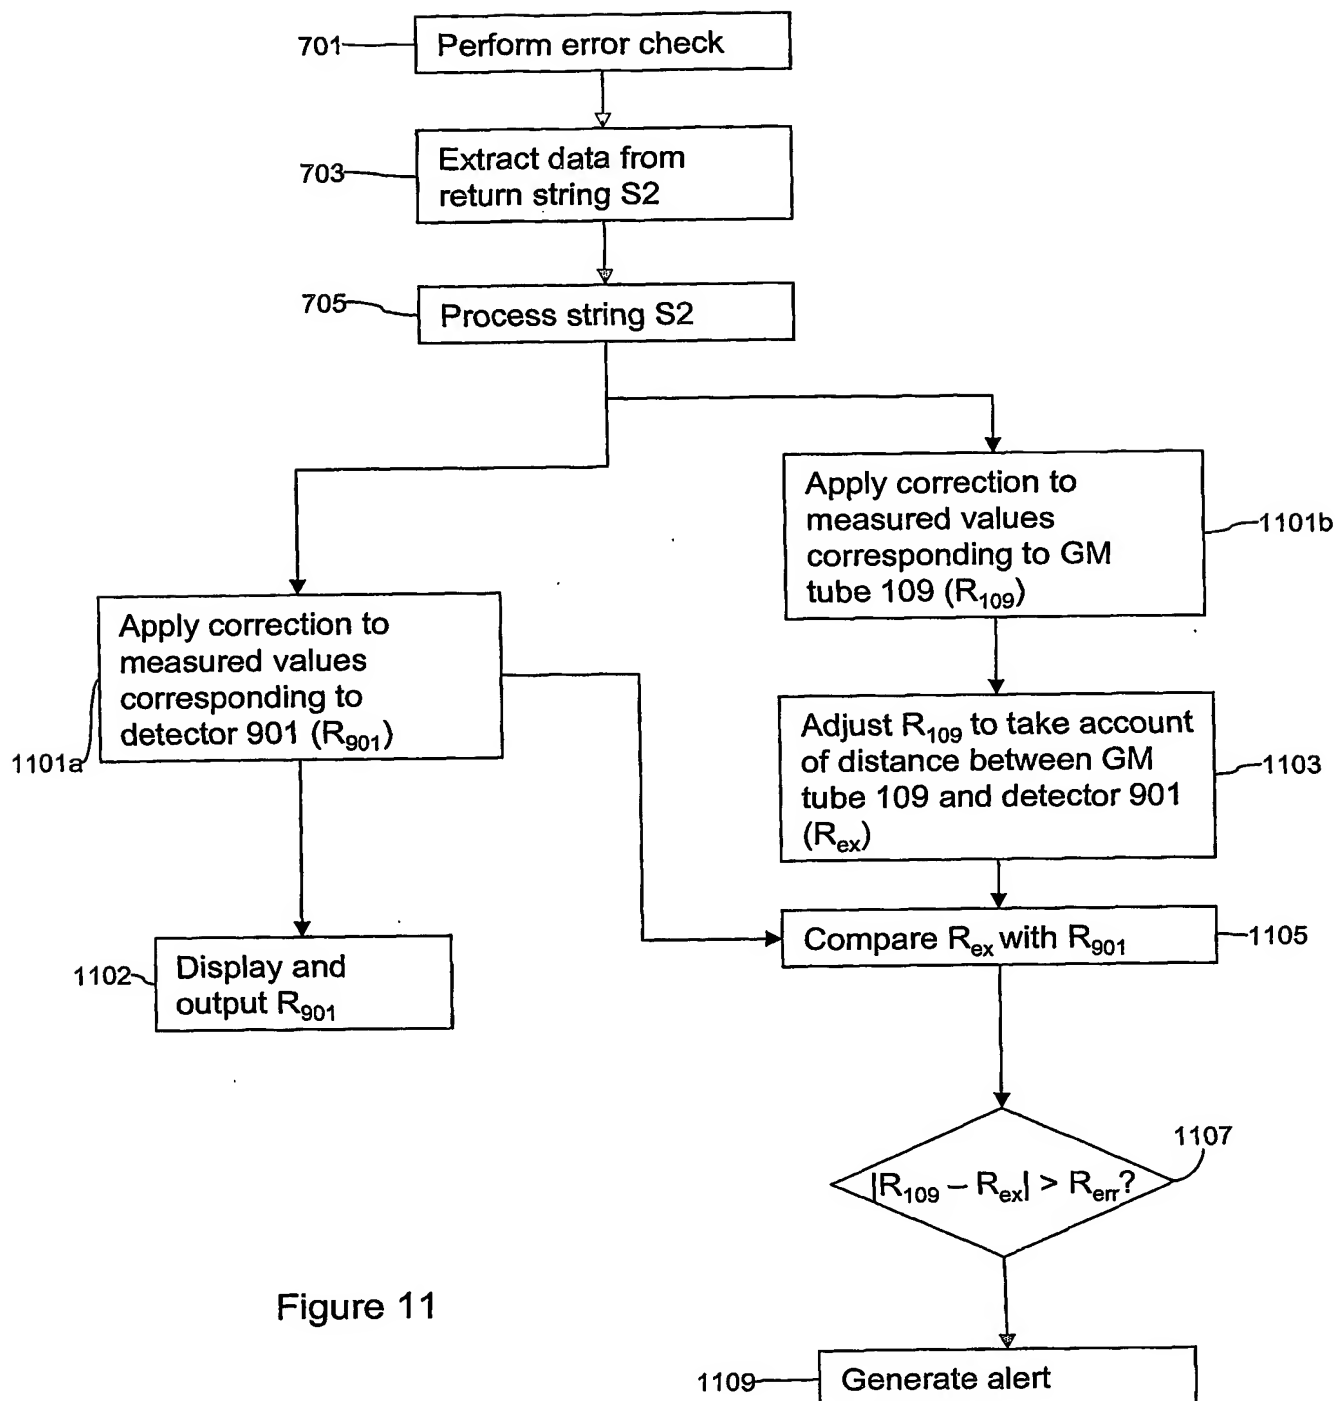


Figure 11

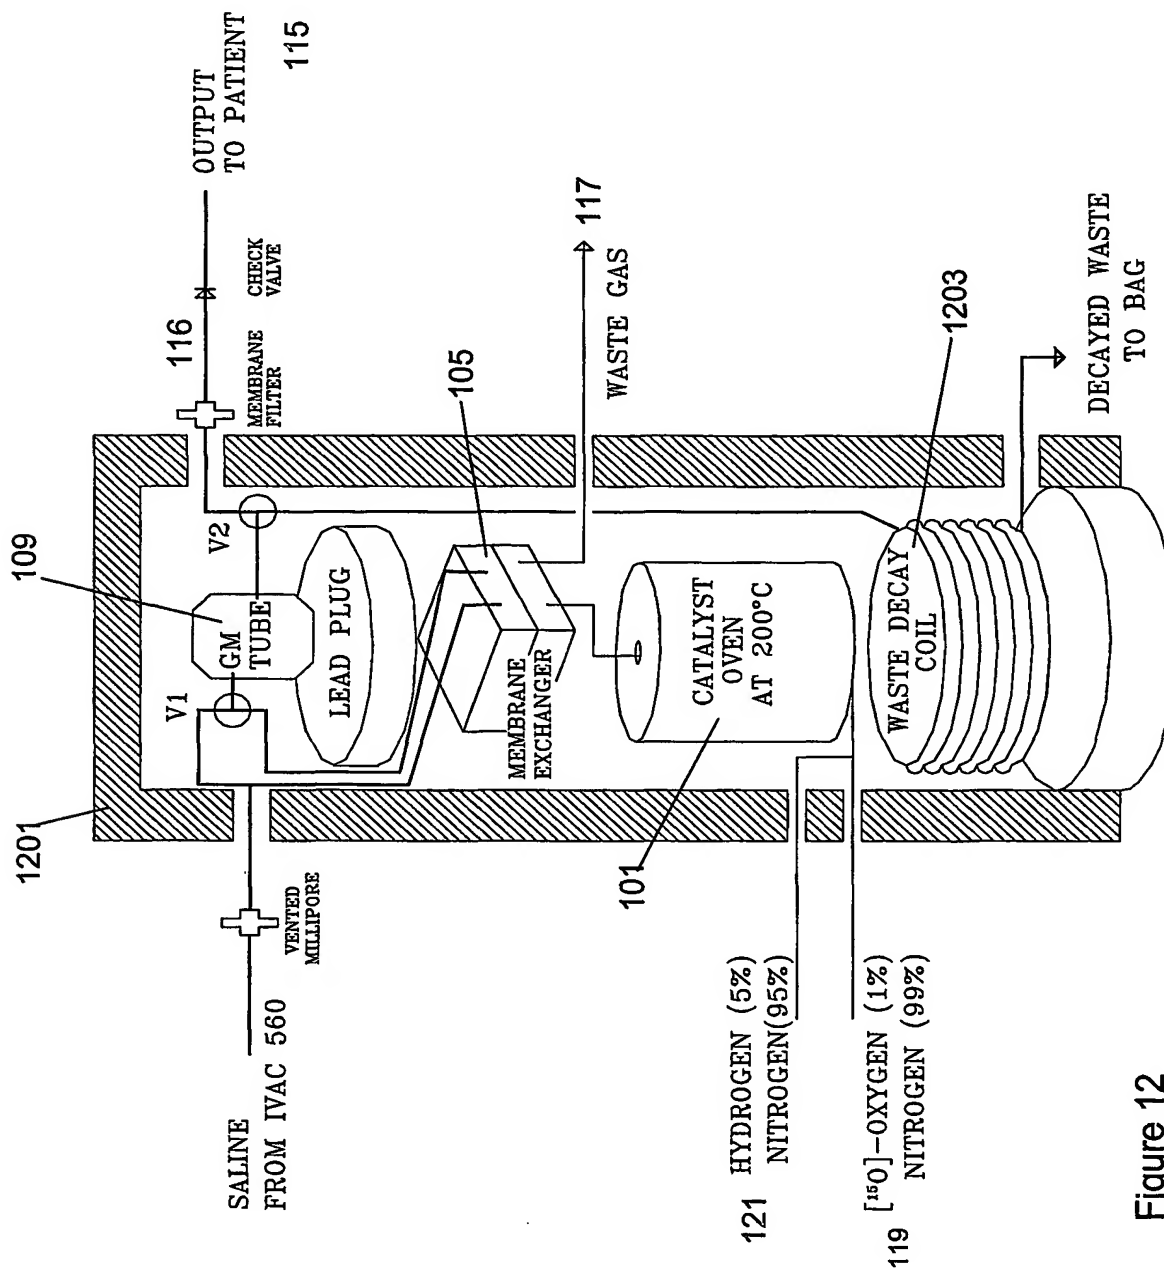


Figure 12